



| Type No. | 98.00399 | | |
|---------------------------------|---|-----------|-----------|
| Electrical | | | |
| Port | Port1 | Port2 | Port3 |
| Frequency (MHz) | 800-960 | 1710-2170 | 2400-2500 |
| Insertion Loss (dB) | ≤ 0.5 | | |
| Isolation (dB) | ≥ 80 | | |
| VSWR | ≤ 1.3:1 | | |
| Impedance | 50 Ω | | |
| Input Power (c.w./per port) | ≤ 300 Watts | | |
| Intermodulation Products | ≤ -150 dBc (3 rd order with 2x20W) | | |
| Environmental | | | |
| Temperature Range | -20 to +55°C (Operating) | | |
| Humidity | 95% max, non condensing | | |
| Application | Indoor, IP40 | | |
| Mechanical | | | |
| Connectors | N female | | |
| Colors | Black (Painting) | | |
| Weight | ≤ 0.9 kg | | |
| Dimensions (without connectors) | 126.5*111.5*36 mm | | |
| Packing | 1 pc/box | | |

Schematic diagram

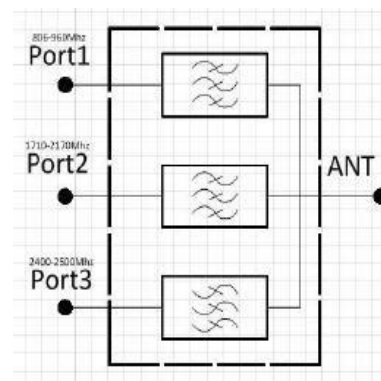

Outline drawing

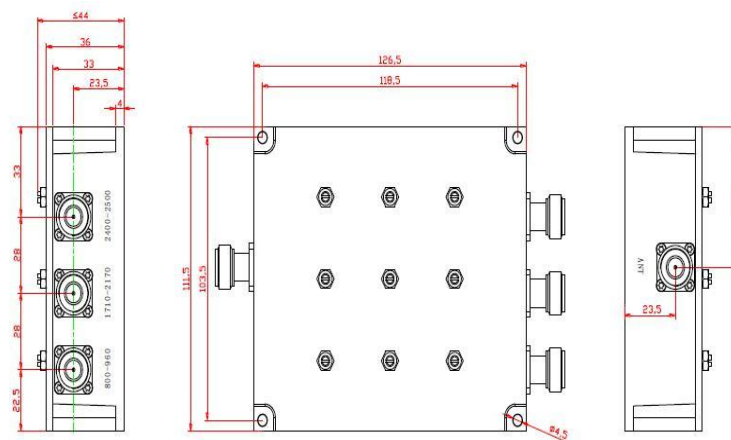

Product picture

