



Type No.	98.0081	
Electrical		
Port	Port1	Port2
Frequency (MHz)	806-960	1710-2170
Insertion Loss (dB)	≤ 0.5	
Isolation (dB)	≥ 80	
VSWR	≤ 1.3:1	
Impedance	50 Ω	
Input Power (c.w./per port)	≤ 300 Watts	
Intermodulation Products	≤ -150 dBc (3 <sup>rd</sup> order with 2x20W)	
Environmental		
Temperature Range	-20 to +55°C (Operating)	
Humidity	95% max, non condensing	
Application	Indoor, IP40	
Mechanical		
Connectors	N female	
Colors	Black (Painting)	
Weight	≤ 0.96 kg	
Dimensions (without connectors)	148*73*30 mm	
Packing	1 pc/box	

Schematic diagram

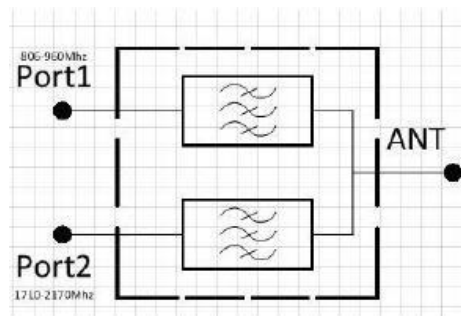

Outline drawing

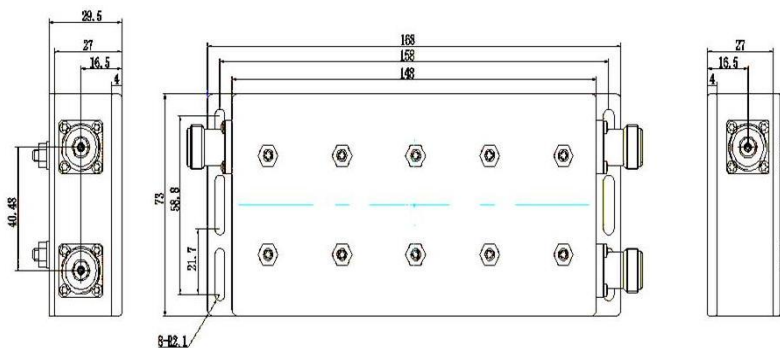

Product picture

