



Type No.	98.00886			
Electrical				
Port	Port1	Port2	Port3	Port4
Frequency (MHz)	380-960	1710-1880	1920-2200	2300-2700
Insertion Loss (dB)	≤ 0.3			
Ripple in band (dB)	≤ 0.25			
Isolation (dB)	≥ 50			
VSWR	≤ 1.3:1			
Impedance	50 Ω			
Input Power (c.w./per port)	≤ 300 Watts			
Intermodulation	≤ -160dBc (3 rd order; with 2×20W)			
DC/AISG	By-pass (2500 mA max.)			
Lightning Protection	3kA; 10/350us pulse			
Environmental				
Temperature Range	-25 to +65°C (Operating)			
Application	IP66			
Mechanical				
Connectors	DIN 7-16 female (long neck)			
Colors	Grey, RAL 7035 (powdering)			
Weight	Single unit: ≤ 3.3 kg			
Dimensions (without connectors)	Single unit: Single unit: 215*200*50 mm			
Packing with bracket	1 pc /box			

Schematic diagram



Outline drawing

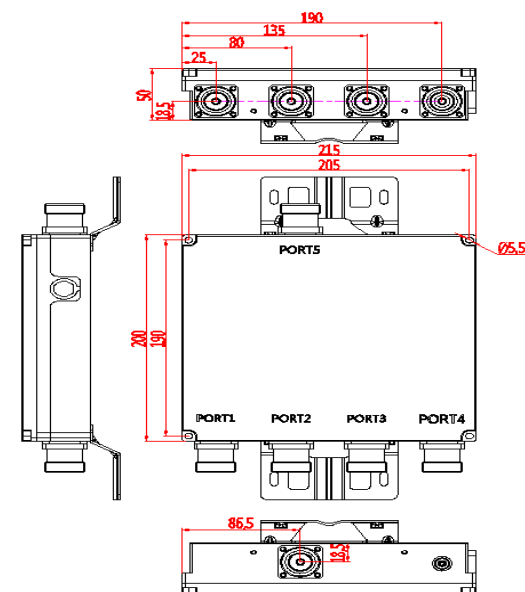

Product picture

