



<b>Type No.</b>	<b>95.00012</b>
<b>Electrical</b>	
Port	
Frequency (MHz)	698-2700
Insertion Loss (dB)	≤ 6.9
Isolation (dB)	≥ 23
VSWR	≤ 1.25:1
Impedance	50 Ω
Input Power (c.w./per port)	≤ 300 W
Intermodulation Products	≤ -160 dBc (3 <sup>rd</sup> order with 2x20W)
<b>Environmental</b>	
Temperature Range	-45 to +75°C (Operating)
Application	Outdoor, IP67
<b>Mechanical</b>	
Connectors	DIN 7-16 female (long neck)
Colors	Grey, RAL 7035 (powdering)
Weight	≤ 2.4 kg
Dimensions (without connectors and brackets)	Single unit: 220*95*61.5 mm
Packing (with bracket)	1 pc/box

### Schematic diagram

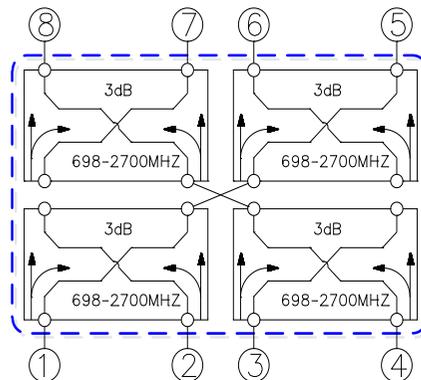

### Outline drawing

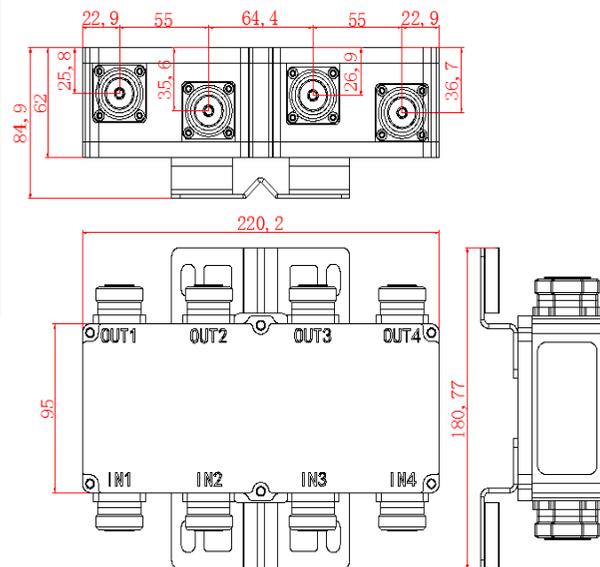

### Product picture

