



Type No.	95.00021	95.00022	95.00023	95.00024	95.00025	95.00026
Electrical						
Frequency (MHz)	698 - 2700					
Coupling (dB)	5	6	7	10	15	20
Insertion Loss (dB)	≤ 2.3	≤ 1.76	≤ 1.5	≤ 0.96	≤ 0.44	≤ 0.34
Flatness (dB)	≤ ±0.8	≤ ±0.8	≤ ±0.8	≤ ±1.0	≤ ±1.0	≤ ±1.0
Isolation (dB)	≥ 23	≥ 24	≥ 25	≥ 28	≥ 33	≥ 38
VSWR	≤ 1.25:1					
Impedance	50 Ω					
Input Power c.w.(per input port)	≤ 200 Watts					
Intermodulation Products	≤ -150 dBc(3 rd order with 2×20W)					
Environmental						
Temperature Range	-20 to +55°C (Operating)					
Humidity	95% max, non condensing					
Application	Indoor, IP40					
Mechanical						
Connectors	N female					
Colors	Black (Painting)					
Weight	≤ 0.18 kg					
Dimensions	120*40*17 mm					
Packing	1 pc/box					

Schematic diagram



Outline drawing

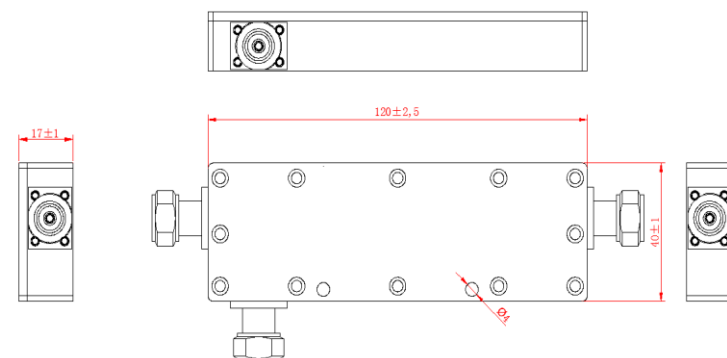

Product picture

