


Type No.	98.00770	
Electrical		
Port	Port1	Port2
Frequency	889-954&1710-2025	2300-2400
Insertion Loss(dB)	$\leq 0.8\text{dB}$	
Isolation(dB)	$\geq 80\text{ dB}$	
VSWR	≤ 1.3	
Impedance	$50\ \Omega$	
Input Power(avg)	$\leq 200\text{ W(avg.)}$	
Intermodulation products	$\leq -150\text{ dBc}(3^{\text{rd}}\text{ order with }2\times 20\text{W})$	
Environmental		
Temperature Range	$-20\text{ }^{\circ}\text{C}— +55\text{ }^{\circ}\text{C(Operating)}$	
Operating humidity	5% - 95%	
Application	Indoor	
Mechanical		
Connectors	3pcs N-Female	
Colors	Black(Painting)	
Weight	1.0kg	
Dimensions	127.6*108*30 mm(without connectors)	
Packing	1 pc/box	

Schematic diagram



Outline drawing

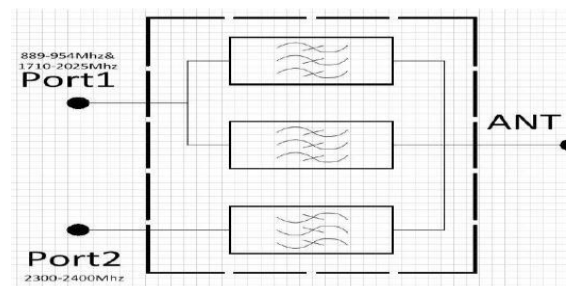