


Type No.	98.00803			
Electrical				
Port	Port1	Port2	Port3	Port4
Frequency (MHz)	889-954	1710-1830	1880-2025	2575-2635
Insertion Loss (dB)	≤ 0.8			
Isolation (dB)	≥ 80			
VSWR	≤ 1.3:1			
Impedance	50 Ω			
Input Power (c.w./per port)	≤ 200 Watts			
Intermodulation Products	≤ -150 dBc (3 <sup>rd</sup> order with 2×20W)			
Environmental				
Temperature Range	-20 to +55°C (Operating)			
Humidity	95% max, non condensing			
Sealing	IP65			
Mechanical				
Connectors	N female			
Colors	Grey, RAL 7035 (powdering)			
Weight	≤ 2.1 kg			
Dimensions (without	175*145*46 mm			
Packing	1 pc/box			

Product picture



Schematic diagram

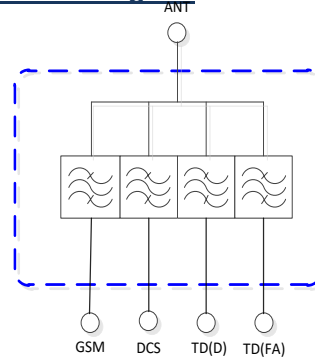

Outline drawing

